
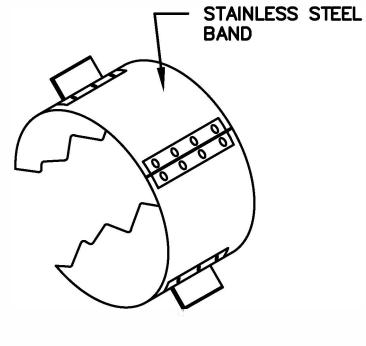


CASING SEAL

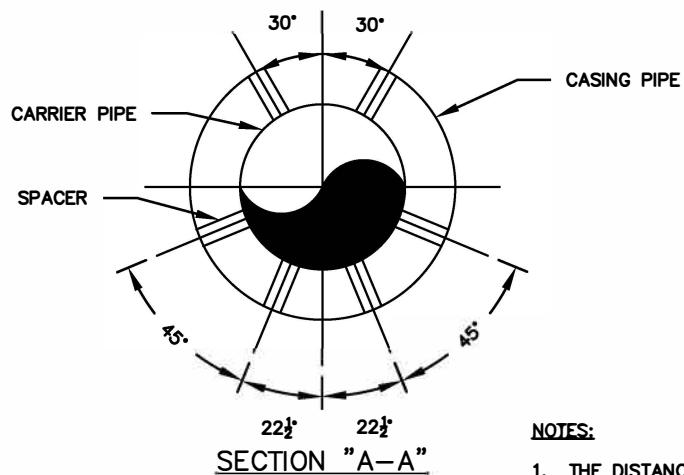

CASING SPACERS

NOTES:

1. THE DISTANCE BETWEEN SPACERS AND THEIR POSITION ON THE CARRIER PIPE IS TO BE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.
2. THE CARRIER PIPE SHALL BE CENTERED IN THE CASING PIPE.
3. THE SKIDS ON THE SPACER SHALL RESTRAIN CARRIER PIPE MOVEMENT.

DATE: 08/24

DRAWN: KHA



CITY OF MARGATE, FLORIDA
DEPARTMENT OF ENVIRONMENTAL
AND ENGINEERING SERVICES

**CASING PIPE
JACK AND BORE**

G-19